



INVITATION TO BID

Main Office Golayee Wazirabad PO Box 208

PO Box 208
Kabul, Afghanistan
Construction of Two Check Dams for DACAAR Program DANIDA

Phone: +93 202230752

Mobile: +93 700288232

Mobile: +93 700288232

الم الحال داوطلبي براى اعمار و ساختمان دو چک ديم براى پروگرام داکار

E-mail: dacaar@dacaar.org

Website: www.dacaar.org

Language All State Control of the Control o

پست بکس ۲۰۸ کابل، افغانستان تیلفون:۲۲۳۰۷۵۲۲ +۹۳۲۰۲۲۳۰۷۵۲ موبایل: ۹۳۷۰۰۲۸۸۲۳۲ ایمیل: www.dacaar.org

Date: October 02, 2025

DACAAR ITB 40 PRF-732-733/DANIDA/2501-DANIDA/DAN2.1/09.2025

DACAAR needs Construction of two Check Dam in Qara Ghoshi Haji Musa Khan and Wakil Qayoum Villages Dasht-e- Archi District of Kunduz Province and invites interested parties to submit their sealed offers for the required job mentioned in Annex (I).

داکار برای اعمار و ساختمان دو چک دیم که در ضمیمه (I) از آن به تفصیل ذکر گردیده در قریه های قره گوشی حاجی موسی خان و وکیل قیوم ولسوالی دشت ارچی و لایت کندز ضرورت دارد، و از تمام داوطلبان و اجد شرایط دعوت بعمل میآورد تا آفر های سربسته شانرا قبل از معیاد تعین شده به دفتر داکار مرکزی بسپارند.

The offers must be submitted to DACAAR Main Office Logistics Unit located in Street No. 12, Taimani Project, Qala-e-Fathullah, Kabul Province till 4:00 PM October 22, 2025.

آفرها باید الی تاریخ 22 اکتوبر 2025 ساعت 4:00 عصر به شعبه لوجستیک دفتر مرکزی داکار واقع پروژه تایمنی پایکوب نصوار سرک 12 قلعه فتح الله و لایت کابل سپرده شود.

The offers will be opened on October 23, 2025 at 10:00am in DACAAR Main Office, Kabul Province and the winner of the biding will be notified shortly after the bid opening session.

مجلس آفرگشایی ساعت 10:00 قبل از ظهر تاریخ 23 اکتوبر 2025 در دفتر مرکزی داکار در ولایت کابل صورت میگیرد که متعاقباً برنده داوطلبی در اسرع وقت اطلاع خواهد یافت.

Please use Annex (III) for Technical Specification, Annex (II) for Work Plan and Annex (I) for Financial purposes.

لطفاً ضمیمه (I) را بخاطر ارایه آفر، ضمیمه (II) را بخاطر پلان کاری و ضمیمه (III) را بخاطر مشخصات تخنیکی مشاهده نمائید.

Terms and Conditions for Participation/Bid Winner

شرایط قرارداد برای برنده داوطلبی/ اشتراک کننده گان

- Contractor should Construct the Check Dams in Qara Ghoshi Haji Musa Khan and Wakil Qayoum Villages Dasht-e- Archi District of Kunduz Province based on completion plan mentioned in Annex (II).
- 1. قرارداد گیرنده مکلف است تا اعمار دو دانه چک دیم را که در قریه های قره گوشی حاجی موسی خان و وکیل قیوم ولسوالی دشت ارچی ولایت کندز موقعیت دارد، طبق پلان کاری که در ضمیمه (II) ذکر گردیده تکمیل نماید.
- 2. Priority is given to construction companies.

- 2. حق اولویت به شرکت های ساختمانی داده میشود.
- 3. Similar works experience as prime contractor in the construction of at least one works in nature and complexity equivalent.
- داشتن تجربه کاری مشابه حداقل یک پروژه که ماهیت و پیچیدگی آن مشابه به این پروژه باشد.
- 4. Provision of all tools and equipment's required for the Construction of Check Dam belongs to the contractor.
- تهیه تمام وسایل و مواد برای اعمار و ساختمان چک دم معه اعاشه و اباطه بدوش قرارداد گیرنده میباشد.

- 5. The contractor must have a qualified technical team, and the CVs of the team members should be attached to this RFQ.
- 6. Please Submit your Valid Business license along with this ITB.
- 7. Payment will be made within 25 working days after technical team confirmation and successfully completion of the contract.
- 8. The bid winner must deposit 10% amount of total contract value to DACAAR bank account as a Contract Performance Guarantee before signing the contract, the mentioned amount only refundable after successful completion of the contract.
- 9. In case of delay in contract completion without any logical reasons, 0.5% of total value of the remaining work will be deducted from the payment. This penalty will charge per each official day of delay.
- 10. Quotations should be valid for 60 official days.
- 11. Prices shall be given in Afghanis (AFN) and must include all duties, transport cost, loading and unloading costs. Offers without sign and stamp will not be accepted. Manipulated/overwritten offers will automatically be rejected.
- 12. DACAAR's technical team (Site Engineer) will check quality of work. If it is not according to the specifications, DACAAR Technical Team has reserved the right to terminate the contract without any compensation paid to the contractor.
- 13. 2% Tax will be applicable on the companies that has valid business license and 7% Tax will be applicable on the companies that have invalid business license, or on individuals who do not have business license, will be deducted from the contractor as a withholding tax and DACAAR will pay that amount to Ministry of Finance, the amount starts from (1 AFN).

- قرارداد گیرنده باید دارای یک تیم فنی واجد شرایط باشد و خلص سوانه تیم خود را ضمیمه ابن آفر نماید.
 - 6. لطفا جواز كارى خويش را ضميمه آفر تان نمايد.
- 7. پرداخت پول بعد از تصدیق بخش تخنیکی داکار و تکمیل نمودن مؤفقانه قرارداد در مدت 25 روز کاری اجرا میگردد.
- 8. برنده داوطلبی مکلف است تا %10 مجموع ارزش قرارداد را بشکل تضمین بانکی از اجرای کامل و مؤفقانه قرارداد قبل از امضا آن به حساب بانکی داکار بپردازد. مبلغ متذکره در صورت اجرا مؤفقانه قرارداد قابل باز پرداخت میباشد.
- در صورت تأخیر در تکمیل قرراداد بدون عذر موجه در وقت معینه آن، مبلغ %0.5 از هر روز کار تأخیر شده بطور جرمانه از مجموع ارزش قرارداد اخذ میگردد.
- 10. قیمت داده شده باید برای مدت 60 روز کاری مدار اعتبار باشد.
- 11. قیمت ها به افغانی داده شود و باید شامل مالیات، انتقال، قیمت بارگیری و تخلیه باشد و قیمت هائیکه بدون مهر و امضا قابل قبول نمیباشد. آفرهای قلم خورده گی بطور اتومات رد میگردد.
- 12. هئیت تفتیش و بررسی داکار کیفیت کار را به اساس قرارداد چک و ملاحظه نموده در صورتیکه مطابق به مشخصات قرارداد نباشد، داکار حق دارد تا قرارداد را بدون جبران کدام خساره فسخ نماید.
- 13. %2 مالیه برای شرکت هائیکه دارای جواز با اعتبار میباشد، و %7 مالیه برای شرکت هائیکه معیاد جواز آن تکمیل گردیده باشد، و یا اشخاصیکه جواز ندارند توسط داکار وضع گریده و به وزارت مالیه پرداخت میشود، آغاز مبلغ از (1 افغانی).

- 14. DACAAR does not accept sub-contract, in case if it is found that the contract has given the contract to sub-contracting contractor, the contract will automatically be terminated and the supplier will lose their performance guarantee and no compensation will be paid to the contractor.
- 14. داکار به هیچ عنوان قرارداد دست دو را نه پذیرفته، در صورت وقوع چنین حالت قرارداد بصورت اتومات فسخ و قرارداد گیرنده پول تضمین و حق اجوره خویش را از دست میدهد.
- 15. DACAAR will not be responsible for any changes occurred during the contract such as (increment in custom duties, exchange rate etc.)
- 15. داکار به هیچ عنوان مسؤولیت بلند رفتن مالیات گمرکی، اسعار خارجی وغیره مواردی که باعث بلند رفتن قیمت در جریان قرارداد گردد ندارد.
- 16. DACAAR (Logistics Unit) adheres to National and International laws on child labour DACAAR makes sure all its suppliers and vendor abide by such laws preventing child labour in all DACAAR activities countrywide.
- 16. دفتر داکار (شعبه لوژیستیک) با درنظرداشت قوانین ملی و بین المللی برای جلوگیری از کار کودکان مصمم بوده و سعی میکند که تمام فعالیتهای تهیه کننده گان و مشتریان این اداره به این اصل پابند باشند.
- 17. The Humanitarian Organizations (HO) may conduct on- site visit in the contractor's premises (or may take similar measures) to ensure compliance.
- 17. سازمان های بشر دوستانه (HO) ممکن است تا از محلات و سایت ها به بخاطر اطمینان خاطر و تطبیق درست کار توسط قرار داد گیرنده بازدید بعمل آورده ویا ممکن است اقدامات مشابه را انجام دهد.
- 18. DACAAR has a zero-tolerance policy on sexual exploitation, abuse and harassment, which is defined and described in the policy document "DACAAR policy on preventing and handling sexual exploitation, abuse and harassment".
- 18. داکار دارای پالیسی عدم تحمل در مورد سؤ استفاده، بد رفتاری و آزار و اذیت جنسی میباشد و موقف داکار در همچون مسایل بطور تفصیلی در پالیسی مذکور تشریح شده است.
- 19. Award of contract will be based on the price, capacity and potentiality of bidder which will be decided after evaluation of the company; it is the right of DACAAR to make the decision of awarding contract.
- 19. برنده شدن قرارداد نظر به قیمت، توانائی و ظرفیت کاری داوطلب بوده و بعد از بررسی کمپنی صورت خواهد گرفت. البته داکار تنها حق تصمیم گیری در این زمینه را دارا میباشد.
- 20. All bidders should deposit amount of (50,000 AFN) to DACAAR AIB Bank Afghani Account (0528101008667400) as a Bid Security, otherwise; DACAAR has the right to take the decision.
- 20. تمامی داوطلبان باید مبلغ 50,000 افغانی را بطور تضمین اشتراک در داوطلبی به حساب افغانی داکار (0528101008667400) در بانک بین المللی افغانستان جمع نموده و رسید بانکی آنرا بداخل پاکت آفر بگذارند، در غیر آن داکار حق تصمیم نهایی را دارا میباشد.

Note: All deposits (Bid Security/ Contract Performance Guarantee) will be refunded on proper application of vendors along with original bank deposit slip. The deposit (bid security/ contract performance guarantee) will not be refunded, if the supplier/ bidder withdraws or quits from the process.

نوت: تمام تضمین ها (تضمین اشتراک در داوطلبی / تضمین اجرائیوی قرارداد) به اساس درخواست اشتراک کننده داوطلبی/ قرارداد کننده و ارایه اصل رسید بانکی پس پرداخت میگردد. دواطلب/ قرارداد گیرنده که از پروسه منصرف میگردد یول تضمین شان دوباره وایس نمیگردد.

For more details, please visit DACAAR Logistics Unit Main Office Kabul, Sunday through Thursday, from 8:00am to 03:00 PM or contact on below Email Addresses:

jamal@dacaar.org or wasimullah@dacaar.org

Yours Sincerely, Manager – Logistics Unit Date: October 02, 2025



ANNEX (I)

Budget Breakdown/ فورم ارايه آفر DACAAR ITB 40 PRF-732-733/DANIDA/2501-DANIDA/DAN2.1/09.2025

Lot (I): Construction of Check Dam for DACAAR Program DANIDA Project in Qara Ghoshi Haji Musa Khan Village Dasht-e-Archi District of Kunduz Province:

S.N	Item Name and Specification		Quantity	Unit Price (AFN) (Including 2% or 7% Government Tax, transportation cost)	Total Price (AFN) (Including 2% or 7% Government Tax, transportation cost)				
1	Excavation and removal of excess materials up to 500M	M^3	1,396						
2	Mass Concrete (M200) Shall contain a maximum of 40% boulder stone	M^3	1,073						
3	Dense Filling with quality of will grade	M^3	461						
4	Installation of Water Stopper with waterproof PCC Concrete (1:4)	M	14						
5	PCC M200 (1:1.5:3)	M^3	44						
	Grand Total: AFN								

Bidder Name:	اسم آفر دهنده:
Address and Stamp:	آدرس و مهر کمپنی
Contact No:	نمبر موبائيلنمبر موبائيل
Email Address:	ايمل آدرسالمل آدرسالمل آدرس
Delivery Period:	زمان تحویل دهی

ANNEX (I)

Budget Breakdown/ فورم ارايه آفر DACAAR ITB 40 PRF-732-733/DANIDA/2501-DANIDA/DAN2.1/09.2025

Lot (II): Construction of Check Dam for DACAAR Program DANIDA Project in Wakil Qayoum Village Dasht-e- Archi District of Kunduz Province:

S.N	S.N Item Name and Specification		Quantity	Unit Price (AFN) (Including 2% or 7% Government Tax, transportation cost)	Total Price (AFN) (Including 2% or 7% Government Tax, transportation cost)			
1	Excavation and removal of excess materials up to 500M	\mathbf{M}^3	1,150					
2	Mass Concrete (M200) Shall contain a maximum of 40% boulder stone	M^3	776					
3	Dense Filling with quality of will grade	M^3	460					
4	Installation of Water Stopper with waterproof PCC Concrete (1:4)	M	13					
	Grand Total: AFN							

Bidder Name:	اسم آفر دهنده:
Address and Stamp:	آدرس و مهر کمپنی
Contact No:	نمبر موبائيل
Email Address:	ايمل آدرسالمل آدرسالمل آدرس
Delivery Period:	ز مان تحویل دهی

ANNEX (II)

Tentative Work Plan/ پلان کاری تخمینی DACAAR ITB 40 PRF-732-733/DANIDA/2501-DANIDA/DAN2.1/09.2025

Lot (I): Construction of Check Dam for DACAAR Program DANIDA Project in Qara Ghoshi Haji Musa Khan Village Dasht-e-Archi District of Kunduz Province:

S/No	Specifications	Unit	Quantity of Work	Start Date of the Contract	End Date of the Contract	
1	Excavation and removal of excess materials up to 500M	M^3	1,396			
2	PCC M200 (1:1.5:3)	M^3	44		December 30, 2025	
3	Mass Concrete (M200) Shall contain a maximum of 40%	M^3	1,073	Starts After DACAAR		
4	Dense Filling with quality of will grade	M^3	461	Contract Final Approval		
5	Installation of Water Stopper with waterproof PCC Concrete (1:4)	M	14			

ANNEX (II)

Tentative Work Plan/ پلان کاری تخمینی DACAAR ITB 40 PRF-732-733/DANIDA/2501-DANIDA/DAN2.1/09.2025

Lot (II): Construction of Check Dam for DACAAR Program DANIDA Project in Wakil Qayoum Village Dasht-e- Archi District of Kunduz Province:

S/No	Specifications	Unit	Quantity of Work	Start Date of the Contract	End Date of the Contract	
1	Excavation and removal of excess materials up to 500M	M^3	1,150			
2	Mass Concrete (M200) Shall contain a maximum of 40% boulder stone	M^3	776	Starts After DACAAR	December 30, 2025	
3	Dense Filling with quality of will grade	M^3	460	Contract Final Approval		
4	Installation of Water Stopper with waterproof PCC Concrete (1:4)	M	13			

DACAAR



Program/Technical & Coordination Unit Survey & Design Team

Qara Ghoshi Haji Musa Khan Check Dam Drawings

Project Location:

Province:....Kunduz

District: Dasht-e-Archi

Village:..... Qara Ghoshi Haji Musa Khan

Date: July 2025



LIST OF DRAWINGS

DISCRIPTION	DRAWING NO.
LIST OF DRAWINGS	01
LEGEND AND ABBREVIATIONS	02
TECHNICAL SPECIFICATION	03
TOPO PLAN	04
Site Plan	05
Plan Of Check Dam	06
Section A-A,B-B,C-C,E-E	07
Section D-D,F-F	08
Cross Section	09
Long Section	10

Page 10 of 38

	Funded By	DANIDA	Village Haji Musa Khan	Survey by	Eng.Ab. Wahab/Ab.Zaher	Both	Sheet Index	Project Title	CheckDam
DACAAR / PROGRAM			- District Dasht-e-Archi	Drawn & Designed Reviewed By	by Eng. Sayed Zaki Sadat Eng. Sayed Najib Jalal	70	Scale 01	Drawing Title	LIST OF DRAWINGS
	Implemented By	DACAAR	Province Kunduz	Checked & Approved	By Eng. Abdul Wali Muslih	- Clair	10	Date :	July-2025




	LEGEND:-		ABBREVIATION:-					
_	_	Center Line	Av	AVERAGE	ST	STATION		
4	_	Direction of flow	ВМ	BENCH MARK	THK	THICKNESS		
	-	Grouted Stone Masonry/Pitching Section	В	WIDTH	TYP	TYPICAL		
	-	Mass concrete Section	C/C	CENTER TO CENTER	HFL	HIGH FLOOD LEVEL		
	-	Brick Masonry	D	DEPTH OF WATER	TUC	LIDOTDEAM		
		P.C.C Block	DRG	DRAWING	U/S	UPSTREAM		
		Gabion			YRS	YEARS		
	·—	Gabion Section	DIA, O	DIAMETER	Q	DESIGN DISCHARGE		
, , , , ,	_	Wash/River Bed Material	D.W.L	DESIGN WATER LEVEL	W.L	WATER LEVEL		
(11/1)		Geotextile Mattress	D/S	DOWNSTREAM	N.T.S	NOT TO SCALE		
		Plain Cement Concrete	EL.	ELEVATION				
. "u, ", "£," . ", ", ", ", ", ", ", ", ", ", ", ", ",	3	Reinforced Cement Concrete	F.B	FREE BOARD				
		Bank Protection	HFL	HIGH FLOOD LEVEL				
	_	Compacted Soil	HT.	HEIGHT				
$\mathbb{Q}_{\mathbb{Q}}$	_	Hill	H.G.L	HYDRAULIC GRADE LINE				
NEW-E	3 <u></u> 3	H.F.L / M.W.L	KM, km	KILOMETERE				
E00500	_	Elevation of the point is (100m) in section veiw						
◆ R00000	_	Elevation of the point (100m) in Plan view	M ,m	METRE				
ST-1	_	Traverse Station	Chkd Apprvd	CHECKED APPROVED				
ST-1		Benchmark	M.W.L	MAXIMUM WATER LEVEL				
B.M-1			MIN	MINIMUM	0 SCALE 1:200 (A3)	500 1000 CENTEMETERS		
<u> </u>		Lined Slope	No(s)	NUMBER(S)	0 100 2 SCALE 1:100 (A3)	00 300 400 500 CENTEMETERS		
<u> </u>	-	Earthen Slope	N.G.L	NATURAL GROUND LEVEL	0 10 : SCALE 1:10 (A3)	20 30 40 50 CENTEMETERS		
	_	Ground Level	P.C.C	PLAIN CEMENT CONCRETE	0 SCALE 1:20 (A3) 0 50 1	50 100 CENTEMETERS 00 150 200		
	_	Stone Pitching/Rip Rap	R.C.C	REINFORCED CEMENT CONCRETE	SCALE 1:50 (A3)	CENTEMETERS		

Notes:

- 1- All dimensions are in cm or as specified on drawing.
- 2- For concrete class and stone masonry type refer to Contract Specifications.
- 3- All cut-offs to be constructed against undisturbed soil.
- 4-Location of the structure, setting out and elevations to be confirmed by the WMD representative before construction.
- 5-The contractor shall construct and maintain all necessary
- channels, diviersion and other temporary works necessary to ensure that irrigation water supplies are not interrupted during construction works.
- 6-All elevations are based on local benchmark.
- 7-Coordinates and elevatoin of local bechmark are attached to every single site.
- 8-Contraction joint in concrete coping at wall top shall be provided at 1.0m centers 9.Contraction joint in concrete base slab shall be provided at 2m centers.
- 10-Minimum concrete cover to steel reinforcement shall be 50mm.
- 11-Steel reinforcement shall have a minimum yield stress of 250N/mm2.
- 12-For retaining wall more than 12m in length, expansion joint shall be provided at 12m centers.
- 13-Abbreviations used:
- GI stands for galvanized iron
- EW stands for each way
- EF stands for each face
- FB stands for free board
- Dia stands for diameter
- MS stands for mild steel

Page 11 o	f 38
-----------	------

DACAAR / PROGRAM	Funded By	DANIDA	Village Haji Musa Khan	Survey by	Eng.Ab. Wahab/Ab.Zaher	
			District Dasht-e-Archi	Drawn & Designed b	Y Eng. Sayed Zaki Sadat	
	Implemented By	DACAAR	District Dasht-e-Archi	Reviewed Bv	Eng. Sayed Najib Jalal	
			Province Kunduz	Checked & Approved B	y Eng. Abdul Wali Muslih	

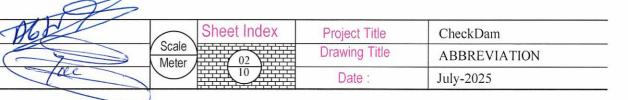

BRIEF TECHNICAL SPECIFICATIONS



CONCRETE WORKS:

- 1 All air entraining plain cement concrete should be M-200 by wright or be as specified on the drawings.
- 2 All PCC to have cement, sand and aggregate as specified on the drawings.
- 3 Concrete design should be based on a compressive strength of fc = 200kg/cm2 or as specified on the drawings.
- 4 Weight per unit volume of concrete W=2400kg/m3.
- 5- Sand or fine aggregate shall be free from salt, Alkali, Calcium sulphate or Vegetation and it shall not contain more than 0.5 percent by weight clay.
- 6 Aggregate:- Coarse aggregate shall consist of crushed gravel with the maximum size of 20mm
- 7 The maximum slump for concrete should be between (5 7.5)cm. (For different concrete type refer to general specification).
- 8 To increase the workability of the concrete provide the chemical admixture (Super plasticizer, If required).
- 9 Water used for concrete mixture and concrete curing shall be from a source approved by the Engineer and at the time of use shall be free from contaminants.
- 10- Concrete compaction should be done by using concrete vibrator at the time of pouring in such a way to form a solid compact concrete.
- 11- Concrete curing should by continued for 28 days.
- 12- During cold weather concreting should be stopped or the contractor has to consider cold weather concreting procedure as accepted by the Engineer. (Or refer to general specification).
- 13- Concrete shuttering / formwork should be of steel or wooden type.
- 14- Concrete shuttering can be removed as per below minimum duration: Side of beams, Walls, Columns (16 24 Hours). Forms from beneath the slabs (Spaning up to 6m.) 14 Days. Forms from beneath the slabs (Spaning above 6m.) 21 Days
- 15- All air entrained concrete with 4.5% 7% of air volumes should be used instead of normal concrete works by adding approved admixture.
- 16- All RCC should be M-25.
- 17- All blinding PCC shall be M-10.
- 18- Reinforcement yield strength fy shall not be less that (2500kg/cm2).

WASONRY WORKS:

- 11-Prlum//Wassair-entraining concrete shall contain a maximum of 40% stone with a maximum stone size as 20cm.

 The concrete ratio shall be M-20.
- 2-Storreffor Storremassomry, Gabiiom and grouted stone pitching should be offcood quality and approved by Engineer.
- 3-All store mesons for foundations should be with ratio of (1:3).
- 4-Allmassomy outtoff well shall be with (1:3) Cement sand mortar or as specified on the drawing.

EARTHWORKS:

- 11 Backfilling matterial should be properly tested and selected to be suitable as per standard practice.
- 2-Fortbæckfilling mæximum thickness of each loose soil layer should not more than 155cm. According to general specification.
- 3-Stantback compaction tests should be carried out for the backfilling.

GABIONIWORKS:


- 11 Storressize ffor garbion shall range from (20 30cm) dia. According to general specification.
- 2-Galvinizzedi iron wirer of specified thickness (2.7-3.0) mm Should be properly woven and kmottedt together to form the required mesh in hexagonal / rectangular shape of size ((8-100cm)) ffor galbion basket and (10-12cm) for gabion mattress to fabricate galbion boxes to the saftsfaction of the Engineer.
- 3-Principal wire along the gabion edges (Selvedges) for gabion boxes should be of galvanizzed iron thaving minimum thickness of (4mm).
- 4-Gabion galvanized iron wire tensile strength should be (350 575 N / mm2).


OTHERS:


- 11 Bitumen coating should be used in all contraction / Expansion joints.
- 2-All quality control field tests should be carried out by the contractor in a specified laboratory as accepted by the client.
- 3 Construction joints for PCC and masonry walls should be provided as (15 20m) countert to content.
- 4-All diversions and flood protection works is contractor responsibility,

Page 12 of 38


ACAAR / PROGRAM	Funded By	Funded By DANIDA		Haji Musa Khan	2 2 1 11	Eng.Ab. Wahab/Ab.Zaher / Eng. Saved Zaki Sadat	
	Implemented By	DACAAR	District Province	Dasht-e-Archi Kunduz	Reviewed By	Eng. Sayed Najib Jalal Eng. Abdul Wali Muslih	

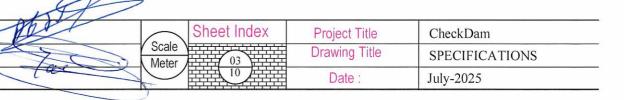

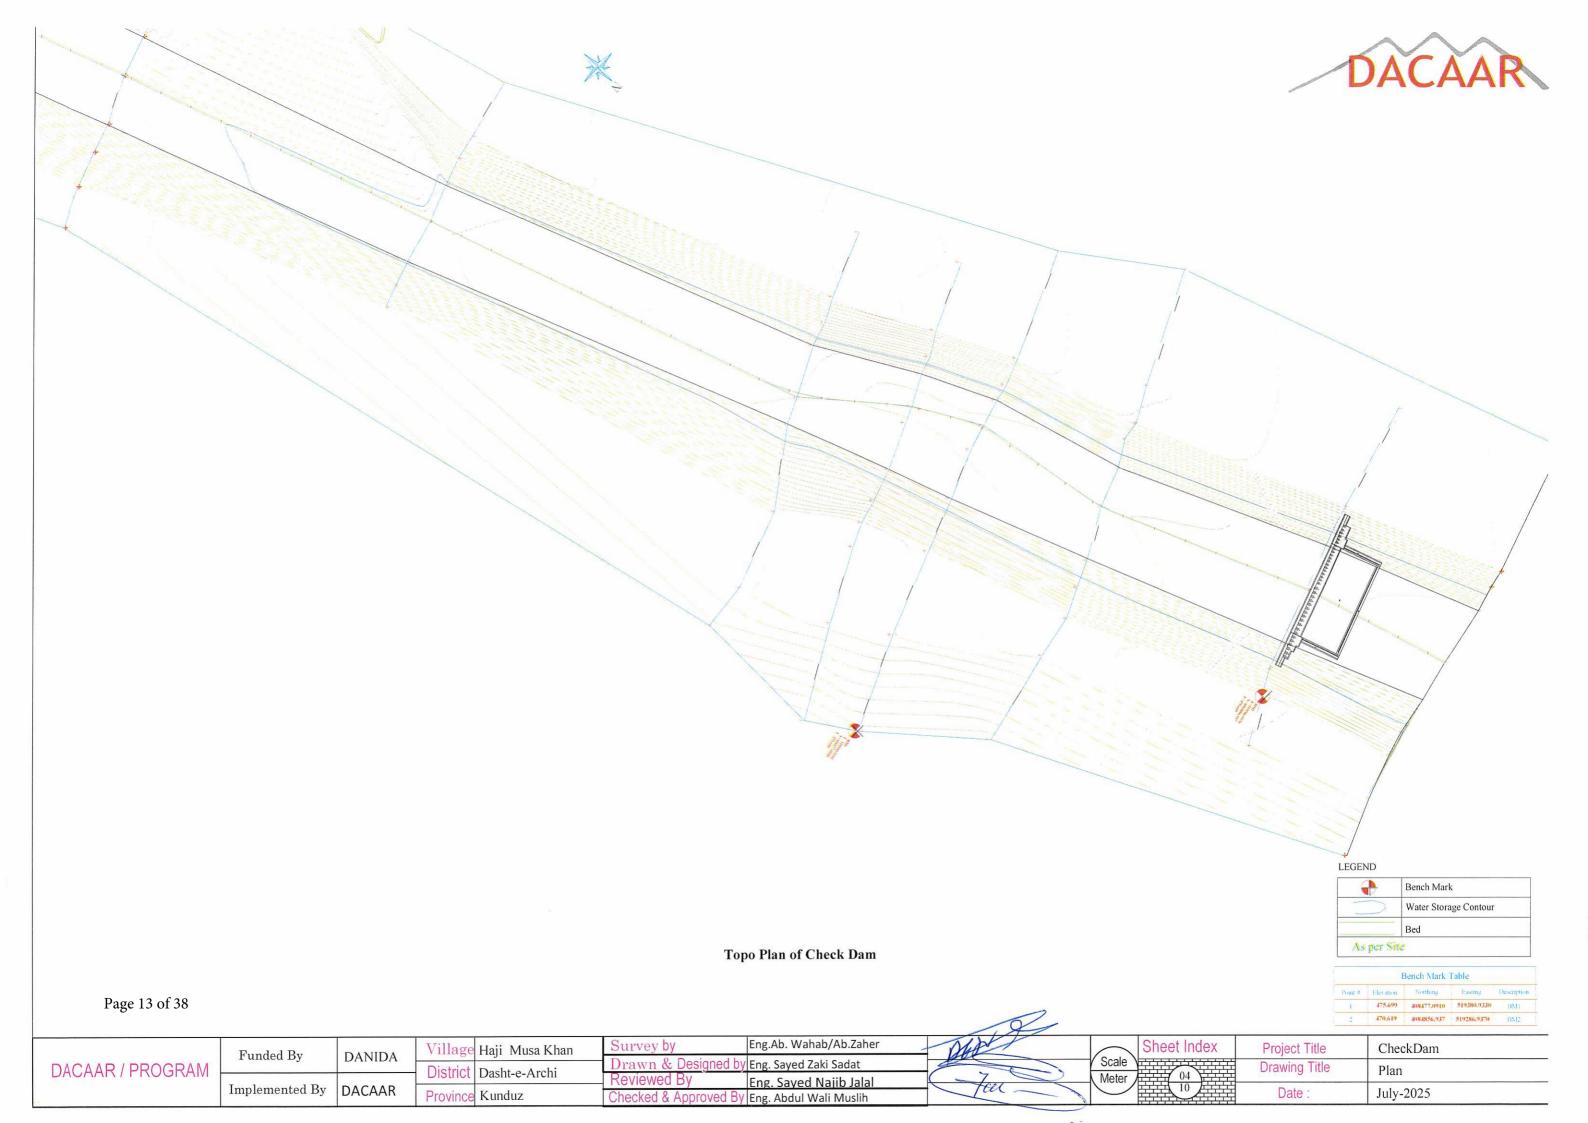

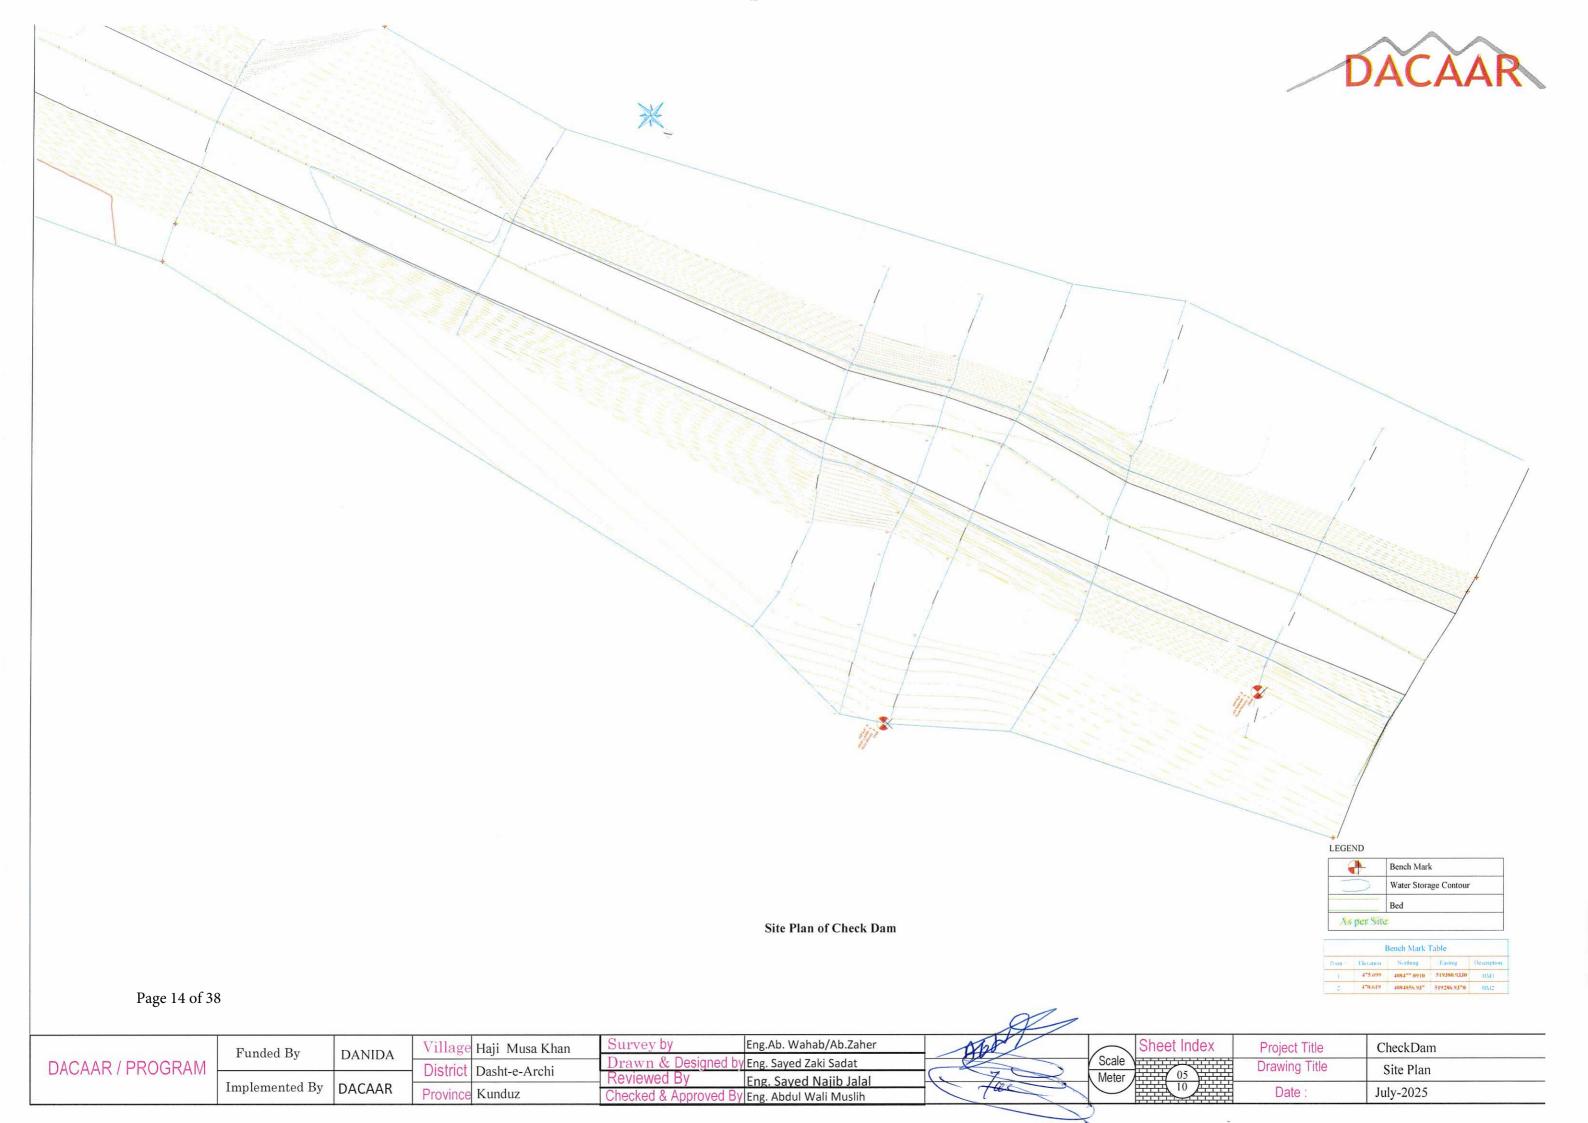



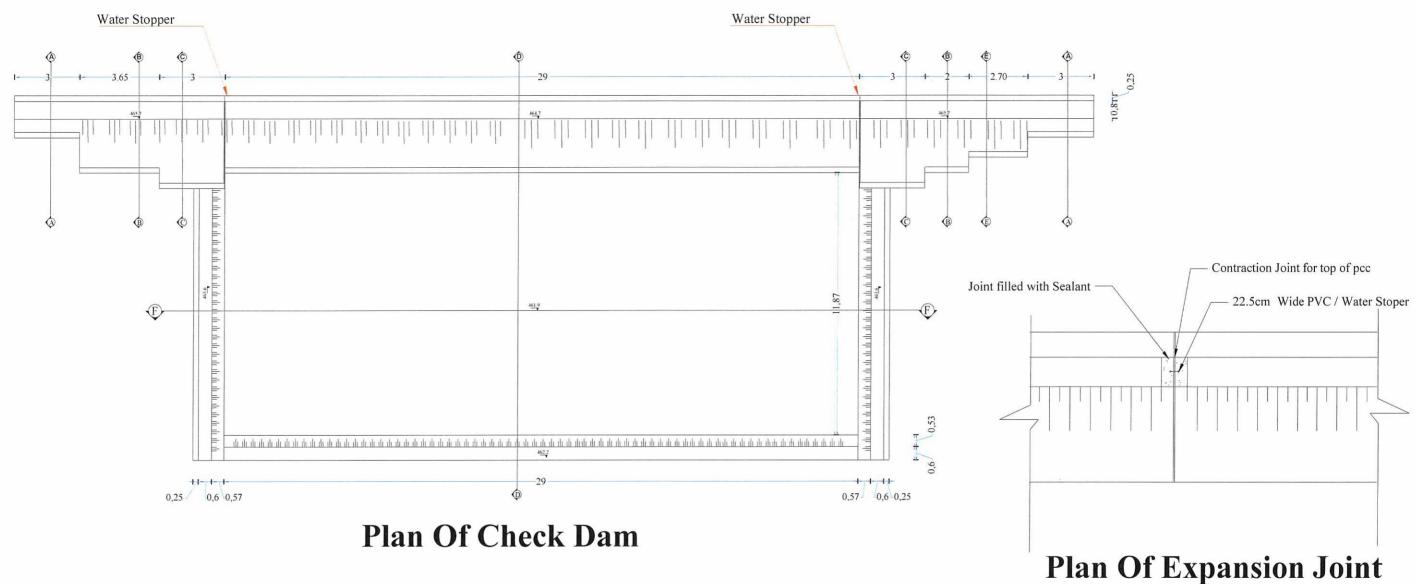


Note:


- All dimensions are in M.
- All Excavated material can be use it upstream and downstream faces fillings with 90% Compaction.
- Filling layers must not be Pave more than (15-20)cm thickness.

Page 15 of 38

	Funded By	DANIDA	Village Haji Musa Khan	Survey by Eng.Ab. Wahab/Ab.Zaher	Sheet Index Project Title	CheckDam
DACAAR / PROGRAM	, , , , , , , , , , , , , , , , , , ,	British	District Dasht-e-Archi	Drawn & Designed by Eng. Sayed Zaki Sadat	Scale Drawing Title	Plan
	Implemented By	DACAAR	Province Kunduz	Checked & Approved By Eng. Abdul Wali Muslih	Meter 100 Date :	July-2025



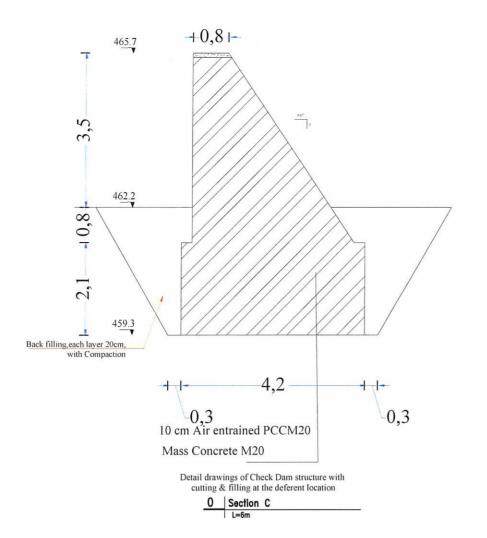

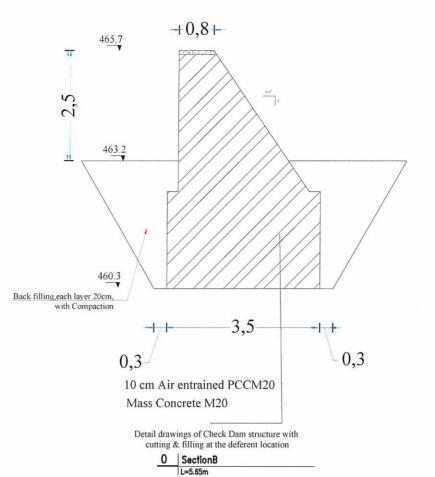

HO,8 I—

465.7

460.9

Back filling, each layer 20cm, with Compaction

With Compaction

2,8

0,3

10 cm Air entrained PCCM20

Mass Concrete M20

Detail drawings of Check Dam structure with cutting & filling at the deferent location

Ho,8+

465.7

462.8

Back filling each layer 20cm, with Compaction

1,9

0,3

10 cm Air entrained PCCM20

Mass Concrete M20

Detail drawings of Check Dam structure with cutting & filling at the deferent location

0 | Section A

L=6m

Page 16 of 38

DACAAR / PROGRAM

Funded By

DANIDA

Village Haji Musa Khan

District Dasht-e-Archi

Implemented By

DACAAR

Village Haji Musa Khan

District Dasht-e-Archi

Province Kunduz

Survey by

Eng.Ab. Wahab/Ab.Zaher

Drawn & Designed by Eng. Sayed Zaki Sadat

Reviewed By

Eng. Sayed Najib Jalal

Checked & Approved By Eng. Abdul Wali Muslih


O Section E L=2.7m

Scale Sheet Index Project Title CheckDam

Scale Drawing Title Section

Date: July-2025



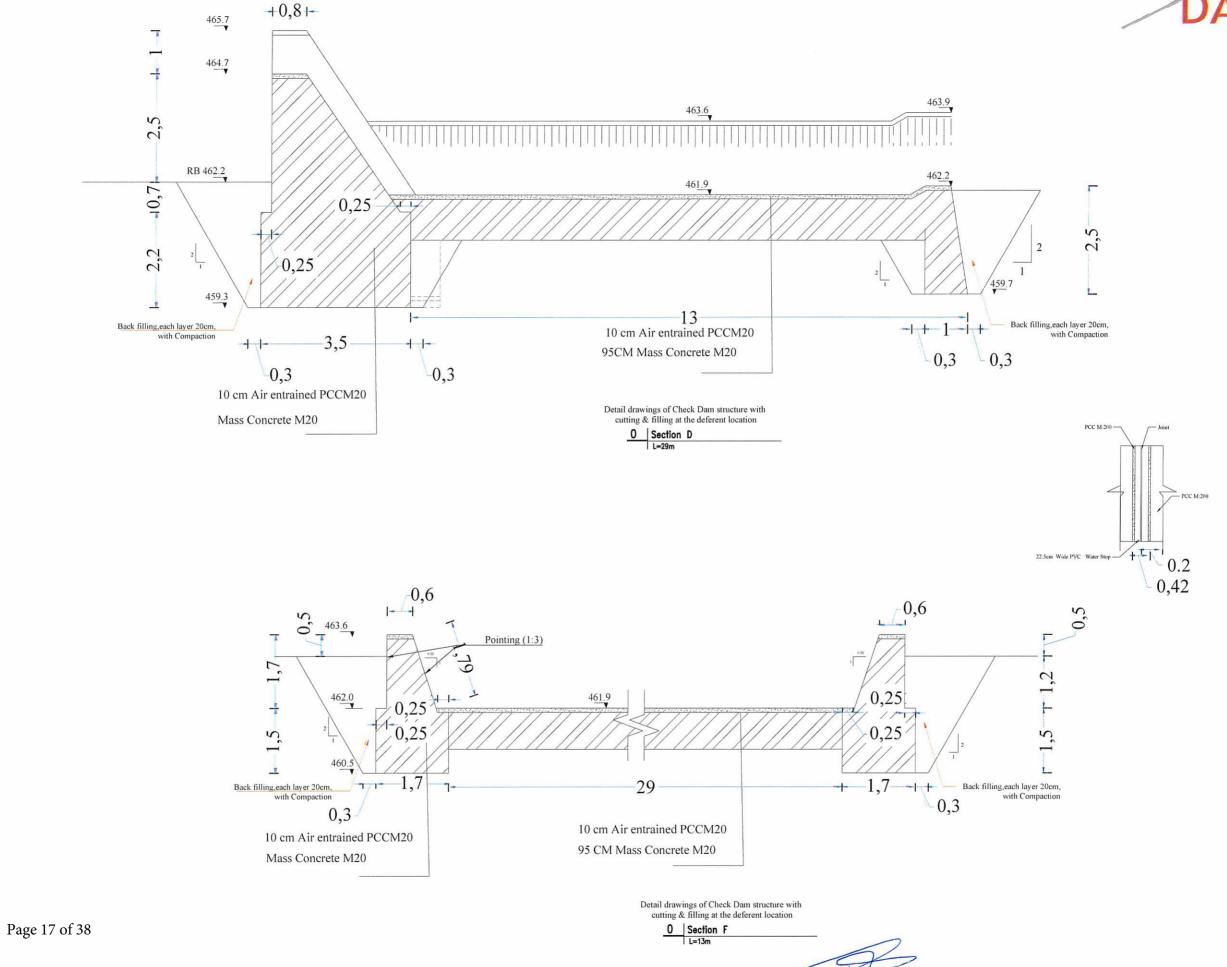

DACAAR / PROGRAM

Funded By
DANIDA
Village Haji Musa Khan
District Dasht-e-Archi

Musa Khan
Drawn & Designed by Eng. Sayed Zaki Sadat
Reviewed By
DACAAR
Province Kunduz

Survey by
Eng.Ab. Wahab/Ab.Zaher

Drawn & Designed by Eng. Sayed Najib Jalal
Checked & Approved By Eng. Abdul Wali Muslih

Scale Sheet Index Project Title CheckDam


Scale Drawing Title Section

Meter 08

Date: July-2025



0+549.48

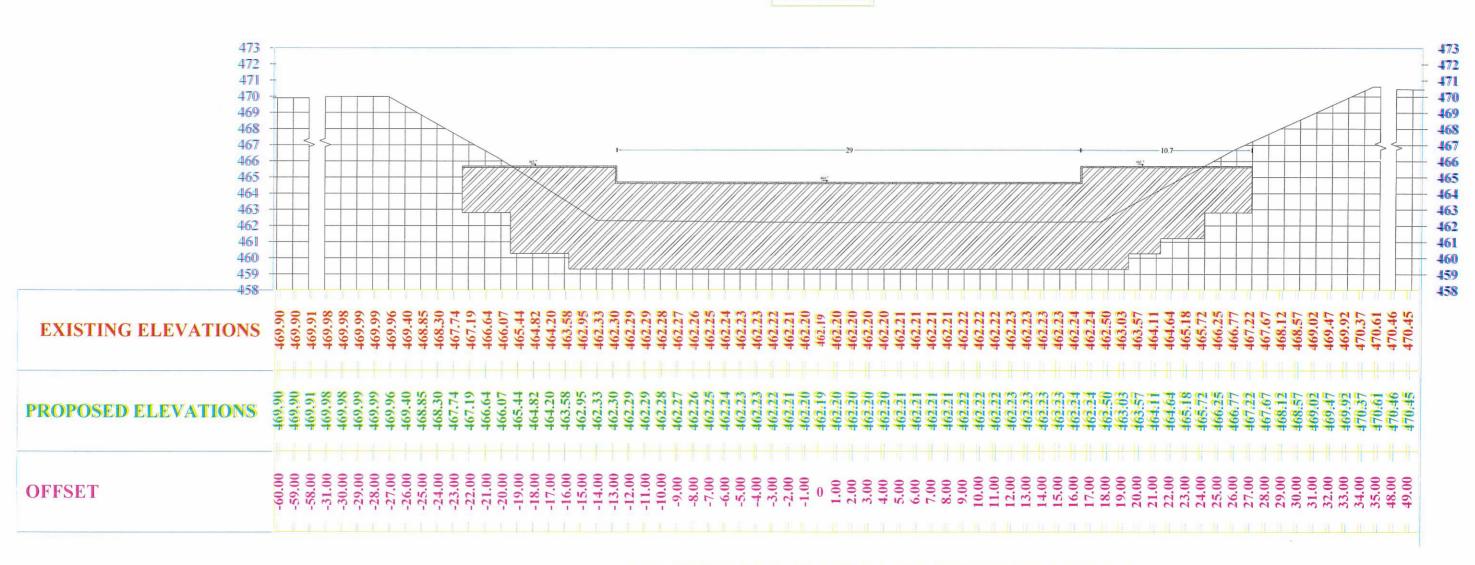


QARA GHOSHI HAJI MUSA KHAN CHECK DAM ON RIVER X-SECTION AT CDE:00000018

Page 18 of 38

		,	-						
DACAAR / PROGRAM	Funded By	DANIDA	Village Haji Musa Khan	Survey by Er	ing.Ab. Wahab/Ab.Zaher	000	Sheet Index	Project Title	CheckDam
	T unded By	DANIDA	District Dasht-e-Archi	Drawn & Designed by Er	ing. Sayed Zaki Sadat		Scale Meter 09	Drawing Title	X-SECTION
	Implemented By	DACAAR	Province Kunduz	Checked & Approved By Er	Ing. Sayed Najib Jalal Ing. Abdul Wali Muslih	fair	Wieter	Date :	July-2025



QARA GHOSHI HAJI MUSA KHAN PROJECT PROFILE

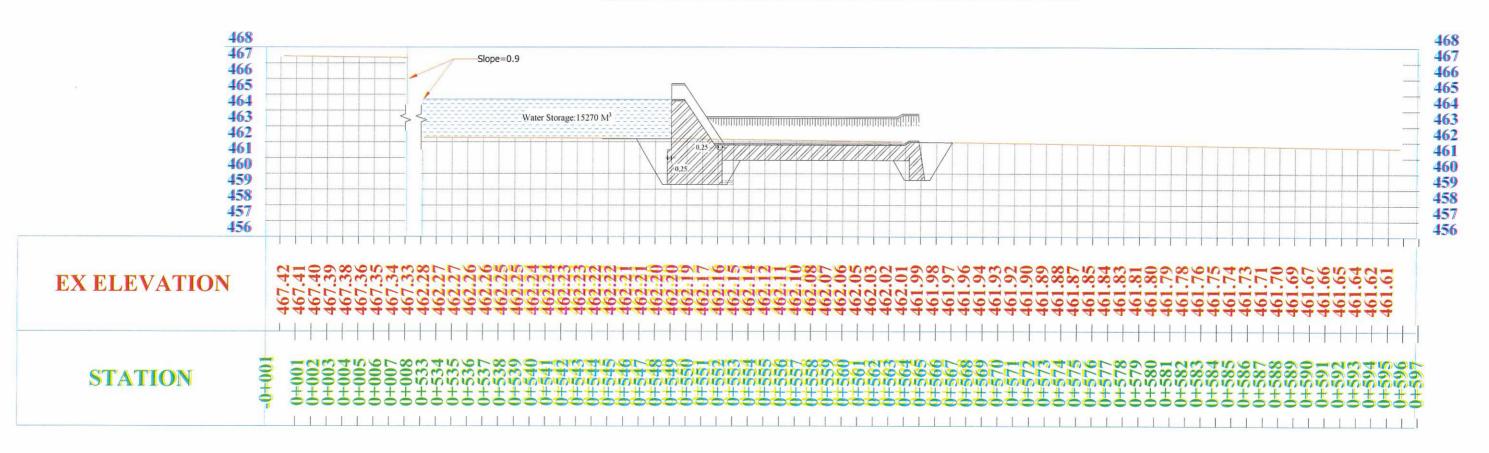

QARA GHOSHI HAJI MUSA KHAN CHECK DAM ON RIVER L- SECTION

Page 19 of 38

	Funded By	DANIDA	Village	Haji Musa Khan	Survey by	Eng.Ab. Wahab/Ab.Zaher			
DACAAR / PROGRAM	T unded by	DANIDA	District	Dasht-e-Archi	Drawn & Designed by	Eng. Sayed Zaki Sadat	t E		
	Implemented By	DACAAB	District		Reviewed By	Eng. Sayed Najib Jalal			
	Implemented by	DACAAR	Province	Kunduz	Checked & Approved By	Eng. Abdul Wali Muslih			



	Sheet Index	Project Title	CheckDam	
Scale Meter	10	Drawing Title	L- SECTION	
	10	Date :	July-2025	

Technical and Coordination Unit/Survey and DesignTeam Bill of Quantity (BOQ) for Construction of Qara Ghoshi Haji Musa Khan Check Dam

Province: Kunduz

District: Dasht-e-Archi

Subproject Name: Qara Ghoshi Haji Musa Khan

Village: Qara Ghoshi Haji Musa Khan Estimation Date: 12.08.2025

Fund by DANIDA

Submitting Date: 12.08.2025 Total cost No. Item Activities % Quantity Unit **Unit cost** Afs Mobinzation: moludes the cost of all activities necessary for project implementation, such as the transfer of personnel, LS tools, vehicles, establishment of the field office, and subsequent demobilization. Normal Excavatingworks: Refers to excavation activities carried out manually, without the use of hydraulic machinery, 2 including the removal of excess materials up to a distance of 500 meters, or as directed by the field engineer. For further 1.396 М3 clarification, refer to Paragraph 2.02 of the Technical Specifications. Dense Filling: Refers to the placement of fill material that meets Well-Graded quality standards, as verified in designated test areas. The compacted density shall not be less than 90% of the Modified Proctor Density in accordance with ASTM 461 M3 standards. When mechanical compaction equipment is used, the layer thickness shall not exceed 20 centimeters. For manual compaction equipment, the layer thickness shall not exceed 10 centimeters. "Mass concrete (M 200): shall contain a maximum of 40% stone with a maximum stone size as 20cm .along with its associated works must be carried out in accordance with the drawings and technical specifications, under the supervision of 4 1.073 M3 the supervising engineer." PCC M(1:1.5:3): Plain Cement Concrete (PCC) with a mix ratio of 1:1.5:3 (cement : sand : coarse aggregate), designed for a compressive strength of 20 MPa. This includes the preparation, pouring, compaction, and curing of the concrete, as well as formwork 44 M3 according to the project plans and technical specifications. All work shall be carried out subject to the approval of the supervising engineer. Installation of Water Stopper with Waterproof PCC Concrete (1:4): Includes the installation of the water stopper embedded in waterproof plain cement concrete with a mix ratio of 1:4 (cement 9 14 m sand). All work shall be executed with proper workmanship and quality control, under the supervision and approval of the supervising engineer. Total Cost in Afg 0 Afs Total Cost in USD

Prepared by:

Name: Position: Sayed Zaki Sadat

Survey & Design Engineer

Signature:

Review and Checked by:

Name:

Sayed Najib Jalal

Position:

Survey & design Coordinator

Signature:

12/08/2025

Authorized by:

Name: Position: Eng.Ab.Wali Muslih

Signature:

Manager Technical & Coordination Un

Eng. Shah Wali

Approved by

Name:

Position: Signature:

Deputy Director/Head of Program

Page 20 of 38

Technical and Coordination Unit/Survey and DesignTeam

Bill of Quantity (BOQ)for Construction of Qara Ghoshi Haji Musa Khan Check Dam
Province: Kunduz
District: Dasht-e-Archi

Village: Qara Ghoshi Haji Musa Khan

Subproject Name: Qara Ghoshi Haji Musa Khan Estimation Date: 12.08.2025

Fund by:	DANIDA						Submitti	ng Date:	12.08.20	25			
S/N	Description	QNT	Unit	2	9	4	 ν	Veeks		9	10	11	12
1	Mobilization: includes the price of all activities such as the transfer of personnel, tools, vehicles, field establishment office and other activities for the implementation of the project and demobilization.	1	LS								10		12
2	"Excavating normal works: which means digging works that were done without hydraulic machines and removal of excess materials up to 500 meters or according to the instructions of the field engineer. For more clarification, refer to paragraph 2.02 of technical specifications	1,396	m3										Description of the second
3	Dense filling" refers to the filling of material with the quality of Will Grade, which can be verified from one area and its density is not less than 90% of Proctor Mody Fide ATM. If the compaction is done by machine, the thickness of the soil should not be increased from 20 cents, in the images of compacting the soil by manual machines, its thickness should not be increased from 10 cents.	461	m3								A		
4	"Mass concrete (M 200): shall contain a maximum of 40% stone with a maximum stone size as 20cm ,along with its associated works must be carried out in accordance with the drawings and technical specifications, under the supervision of the supervising engineer."	1,073	m3							1007		1	
6	PCC M(1:1.5:3):Concrete without spikes with 20 MPa brand preparation, pouring, compacting and watering of 20 brand concrete, including molding with positive things according to the plan, technical specifications and approval of the supervising engineer.	44	m3									1	1
9	Installation of water Stopper whit Waterproof PCC concrete (1:4): with positive aspects under the supervision of the supervising engineer.	14	m								N	1	

Prepared by: Name:

Position: Signature:

Review and Checked by :

Name : Position: Signature: Sayed Zaki Sadat Survey & Design Engineer

Survey & Design Engineer

Sayed Najib Jalal Survey & Design Coordinator Authorized by : Name:

Eng.Ab.Wali Muslih

Position : Signature: Manager Technical & Coordination

Approved by:

Eng. Shah Wali Deputy Director/Head of Program

Position: Deputy Direct Signature:

0.08.25

Technical and Coordination Unit/Survey and DesignTeam Bill of Quantity (BoQ) For Construction of Qara Ghoshi Haji Musa Khan Check Dam

Province:

Kunduz

District:

Dasht-e-Archi

Village:

Qara Ghoshi Haji Musa Khan

Subproject Name: Qara Ghoshi Haji Musa Khan

Fund by

DANIDA

Estimation Date:

12.08.2025

Oara Ghochi Haji Musa Khan Check Dam

Submitting Date:

12 08 2025

Subproject Name: Qara Ghoshi Haji Musa	the fact that the same that the same of th	Submitting Da	CONTRACTOR OF THE PROPERTY OF	12.08.2025
Concrete M	20 Price per 1 Cubic	Meter (40%	Boulder)	
	Material			
Description	Unit	Quantity	Cost	Total
Cement	50 Kg Bag	4.7040000		=
sand	M^3	0.2520000		-
Gravel	M^3	0.5040000		_
Boulder	M^3	0.4000000		
Water Charges	M^3	0.1700000		=
Air entrained	Lit	0.0400000		
Subtotal Material				_
	Labor			
Description	Unit	Quantity	Cost	Total
Skilled Labor	Man	0.1050000		₹ 8
Un Skilled Labor	Man	0.9150000		<u>₩</u> 11
Subtotal Labor		••••		-
	Equipment			
Description	Unit	Quantity	Cost	Total
Formworks	m ²	1		9
Hands Tools	Set	0.0143000		<u>~</u> 0
Mixer	No	0.0019000		_
Viberator	No	0.0019000		<u>-</u>
Fuel for Mixer and Viberator	Lit	0.2600000		-
Subtotal Tools				
Gran	nd Total			=
PCC M (1:1.5:3)				
San avel including transportation	m3	1.055		S.
Cement including transportation	kg	250		
Water	liter	200		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
Skilled labor on site	md	0.7		-
Unskilled labor on site	md	3.6		/ -
Gran	nd Total			

Prepared by:

Name:

Sayed Zaki Sadat

Position:

Survey & Design Engineer

Signature:

1208125

Review and Checked by:

Name:

Sayed Najib Jalal

Position:

Survey & Design Coordinator

Signature:

Page 22 of 38

Authorized by:

Name:

Eng.Ab.Wali Muslin

Position:

Manager Technical

Signature:

Approved by:

Name:

Eng. Shah Wali

Position:

Deputy Director/Head of Program

Signature:

DACAAR



Program/Technical & Coordination Unit Survey & Design Team

Wakil Qayoum Check Dam Drawings

Tw'

Project Location:

Province:....Kunduz

District:.....Dasht-e-Archi

Village:..... Wakil Qayoum

Date: May 2025



LIST OF DRAWINGS

DISCRIPTION	DRAWING NO.
LIST OF DRAWINGS	01
LEGEND AND ABBREVIATIONS	02
TECHNICAL SPECIFICATION	03
TOPO PLAN	04
Site Plan	05
Plan Of Check Dam	06
Section A-A,B-B,E-E	07
Section C-C,D-D	08
Excavations	09
Cross Section	10
Long Section	11

Page 24 of 38

	Funded By	DANIDA	Village Wakil Qayoum		Sayed Zaki Sadat	7uc	Sheet Index	Project Title	CheckDam
DACAA/PROGRAM		D. C. C.	District Dasht-e-Archi	Drawn & Designed by Eng. Sa	Sayed Zaki Sadat	Sc		Drawing Title	LIST OF DRAWINGS
Britor Will Tito City (W)	Implemented De	DACAAR	District Dasiti-e-Archi	Reviewed By Eng. S	Sayed Najib Jalal	Me	eter 01	Drawing Title	LIST OF DRAWINGS
	Implemented By	DACAAR	Province Kunduz	Checked & Approved By Eng. A	Abdul Wali Muslih			Date :	May-2025



	LEGEN	ID:-		ABBREVIATIO	N:-	
- €	-	Center Line	Av	AVERAGE	ST	STATION
	: 	Direction of flow	ВМ	BENCH MARK	THK	THICKNESS
	_	Grouted Stone Masonry/Pitching Section	В	WIDTH	TYP	TYPICAL
	_	Mass concrete Section	C/C	CENTER TO CENTER	HFL	HIGH FLOOD LEVEL
蠿	-	Brick Masonry	D	DEPTH OF WATER	U/S	UPSTREAM
丑	_	P.C.C Block	DRG	DRAWING	YRS	YEARS
1888	_	Gabion	D 0	DUVETER		
	_	Gabion Section	DIA,Ø	DIAMETER	Q	DESIGN DISCHARGE
	_	Wash/River Bed Material	D.W.L	DESIGN WATER LEVEL	W.L	WATER LEVEL
777	_	Geotextile Mattress	D/S	DOWNSTREAM	N.T.S	NOT TO SCALE
	_	Plain Cement Concrete	EL.	ELEVATION		
10.4	_	Reinforced Cement Concrete	F.B	FREE BOARD		
	_	Bank Protection	HFL	HIGH FLOOD LEVEL		
	_	Compacted Soil	HT.	HEIGHT		
W @	_	Hill	H.G.L	HYDRAULIC GRADE LINE		
FM.W.L		H.F.L / M.W.L	KM, km	KILOMETERE		
100.00	-	Elevation of the point is (100m) in section veiw				
3100.00	·	Elevation of the point (100m) in Plan view	M ,m	METRE		
ST-1		Traverse Station	Chkd	CHECKED		
			Apprvd	APPROVED		
B M-1	£5	Benchmark	M.W.L	MAXIMUM WATER LEVEL	0	500 1000
Inte	_	Lined Slope	MIN	MINIMUM	SCALE 1:200 (A3) 0 100 :	CENTEMETERS 200 300 400 500
7777	_	Earthen Slope	No(s)	NUMBER(S)	SCALE 1:100 (A3) 0 10	CENTEMETERS 20 30 40 50
		1	N.G.L	NATURAL GROUND LEVEL	SGALE 1:10 (A3)	CENTEMETERS 50 100
	3	Ground Level	P.C.C	PLAIN CEMENT CONCRETE	SCALE 1:20 (A3) 0 50	CENTEMETERS 100 150 200
149-4	_	Stone Pitching/Rip Rap	R.C.C	REINFORCED CEMENT CONCRETE	SCALE 1:50 (A3)	CENTEMETERS

Notes:

- 1- All dimensions are in cm or as specified on drawing.
- 2- For concrete class and stone masonry type refer to Contract Specifications.
- 3- All cut-offs to be constructed against undisturbed soil.
- 4-Location of the structure, setting out and elevations to be confirmed by the WMD representative before construction.
- 5-The contractor shall construct and maintain all necessary
- channels, diviersion and other temporary works necessary to ensure that irrigation water supplies are not interrupted during construction works.
- 6-All elevations are based on local benchmark.
- 7-Coordinates and elevatoin of local bechmark are attached to every single site.
- 8-Contraction joint in concrete coping at wall top shall be provided at 1.0m centers 9. Contraction joint in concrete base slab shall be provided at 2m centers.
- 10-Minimum concrete cover to steel reinforcement shall be 50mm.
- 11-Steel reinforcement shall have a minimum yield stress of 250N/mm2.
- 12-For retaining wall more than 12m in length, expansion joint shall be provided at 12m centers.
- 13-Abbreviations used:
- GI stands for galvanized iron
- EW stands for each way
- EF stands for each face
- FB stands for free board
- Dia stands for diameter
- MS stands for mild steel

E-10 100-40 10 20 20 20 20 20 20 20 20 20 20 20 20 20	Funded By	DANIDA	Village Wakil Qayoum	Survey by	Eng. Sayed Zaki Sadat	Tus	Sheet Index	Project Title	CheckDam
DACAA/ PROGRAM		W/2017-02-10-00-00-00-00-00-00-00-00-00-00-00-00-	District Dasht-e-Archi	— Reviewed By	by Eng. Sayed Zaki Sadat Eng. Sayed Najib Jalal		Scale 02	Drawing Title	ABBREVIATION
	Implemented By	DACAAR	Province Kunduz		By Eng. Abdul Wali Muslih		Meter 02 11	Date :	May-2025

BRIEF TECHNICAL SPECIFICATIONS



CONCRETE WORKS:

- 1 All air entraining plain cement concrete should be M-200 by wright or be as specified on the drawings.
- 2 All PCC to have cement, sand and aggregate as specified on the drawings.
- 3 Concrete design should be based on a compressive strength of fc = 200kg/cm2 or as specified on the drawings.
- 4 Weight per unit volume of concrete W=2400kg/m3.
- 5- Sand or fine aggregate shall be free from salt, Alkali, Calcium sulphate or Vegetation and it shall not contain more than 0.5 percent by weight clay.
- 6 Aggregate:- Coarse aggregate shall consist of crushed gravel with the maximum size of 20mm.
- 7 The maximum slump for concrete should be between (5 7.5)cm. (For difrent concrete type refer to general specification).
- 8 To increase the workability of the concrete provide the chemical admixture (Super plasticizer, If required).
- 9 Water used for concrete mixture and concrete curing shall be from a source approved by the Engineer and at the time of use shall be free from contaminants.
- 10- Concrete compaction should be done by using concrete vibrator at the time of pouring in such a way to form a solid compact concrete.
- 11- Concrete curing should by continued for 28 days.
- 12- During cold weather concreting should be stopped or the contractor has to consider cold weather concreting procedure as accepted by the Engineer. (Or refer to general specification).
- 13- Concrete shuttering / formwork should be of steel or wooden type.
- 14- Concrete shuttering can be removed as per below minimum duration: Side of beams, Walls, Columns (16 - 24 Hours). Forms from beneath the slabs (Spaning up to 6m.) 14 Days. Forms from beneath the slabs (Spaning above 6m.) 21 Days
- 15- All air entrained concrete with 4.5% 7% of air volumes should be used instead of normal concrete works by adding approved admixture.
- 16- All RCC should be M-25.
- 17- All blinding PCC shall be M-10.
- 18- Reinforcement yield strength fy shall not be less that (2500kg/cm2).

MASONRY WORKS:

- Plum / Mass air entraining concrete shall contain a maximum of 40% stone with a maximum stone size as 20cm.
 The concrete ratio shall be M-20.
- Stone for Stone masonry, Gabion and grouted stone pitching should be of good quality and approved by Engineer.
- 3 All stone masonry for foundations should be with ratio of (1:3).
- 4 All masonry cutoff wall shall be with (1:3) Cement sand mortar or as specified on the drawing.

EARTH WORKS:

- Backfilling material should be properly tested and selected to be suitable as per standard practice.
- 2 For backfilling maximum thickness of each loose soil layer should not more than 15cm. According to general specification.
- 3 Standard compaction tests should be carried out for the backfilling.
- 4 The percentage of compaction should be not less than (92 95)% of the maximum dry density of selected material by the Engineer.


GABION WORKS:


- 1 Stone size for gabion shall range from (20 30cm) dia. According to general specification.
- 2 Galvinized iron wier of specified thickness (2.7- 3.0)mm Should be properly woven and knotted together to form the required mesh in hexagonal / rectangular shape of size (8 10cm) for gabion basket and (10 12cm) for gabion mattress to fabricate gabion boxes to the saftsfaction of the Engineer.
- 3 Principal wire along the gabion edges (Selvedges) for gabion boxes should be of galvanized iron having minimum thickness of (4mm).
- 4 Gabion galvanized iron wire tensile strength should be (350 575 N / mm2).

OTHERS:


- 1 Bitumen coating should be used in all contraction / Expansion joints.
- 2 All quality control field tests should be carried out by the contractor in a specified laboratory as accepted by the client.
- 3 Construction joints for PCC and masonry walls should be provided as (15 20m) center to center.
- 4- All diversions and flood protection works is contractor responsibility.

	Funded By	DANIDA	Village	Wakil Qayoum	· · · · · · · · · · · · · · · · ·	Eng. Sayed Zaki Sadat	=7ac		Sheet Index	Project Title	CheckDam
DACAA/ PROGRAM	T 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	DACAAD	District	Dasht-e-Archi	DIGHTI CO DOCIGITOO D	Eng. Sayed Zaki Sadat Eng. Sayed Najib Jalal		Scale	03	Drawing Title	BRIEF TECHNICAL SPECIFICATIONS
	Implemented By	DACAAR	Province	Kunduz	Checked & Approved By					Date :	May-2025

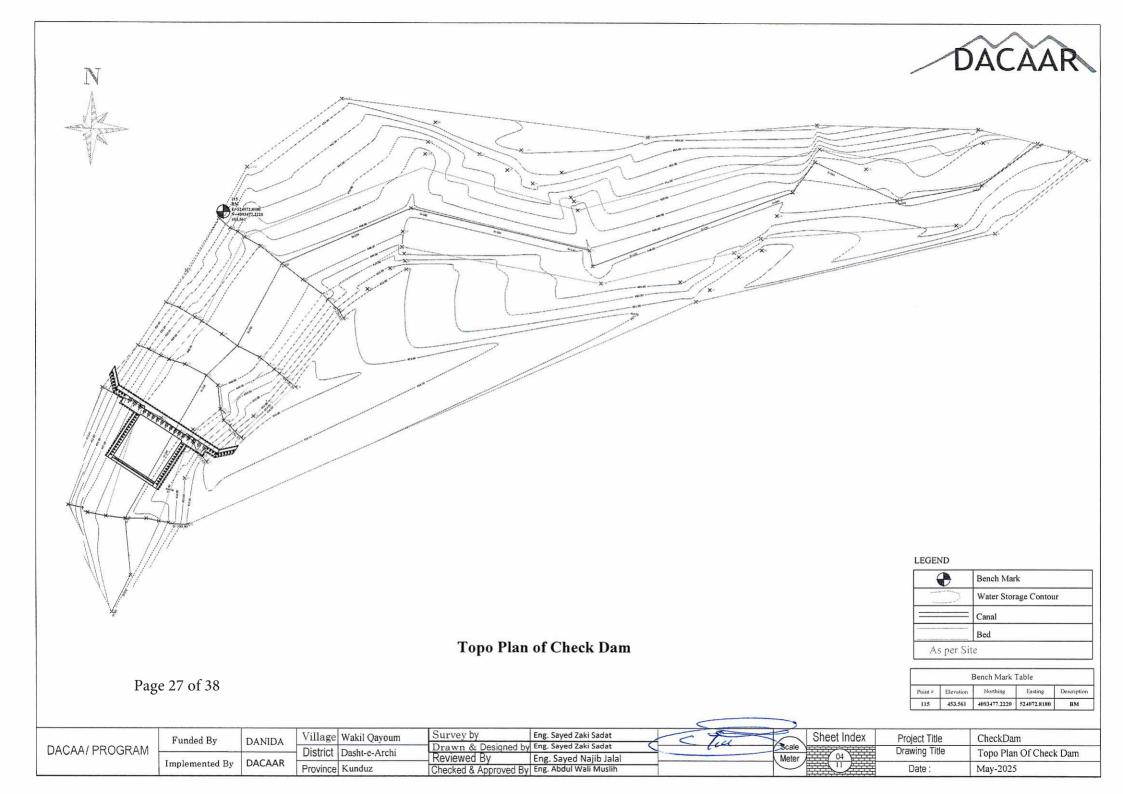

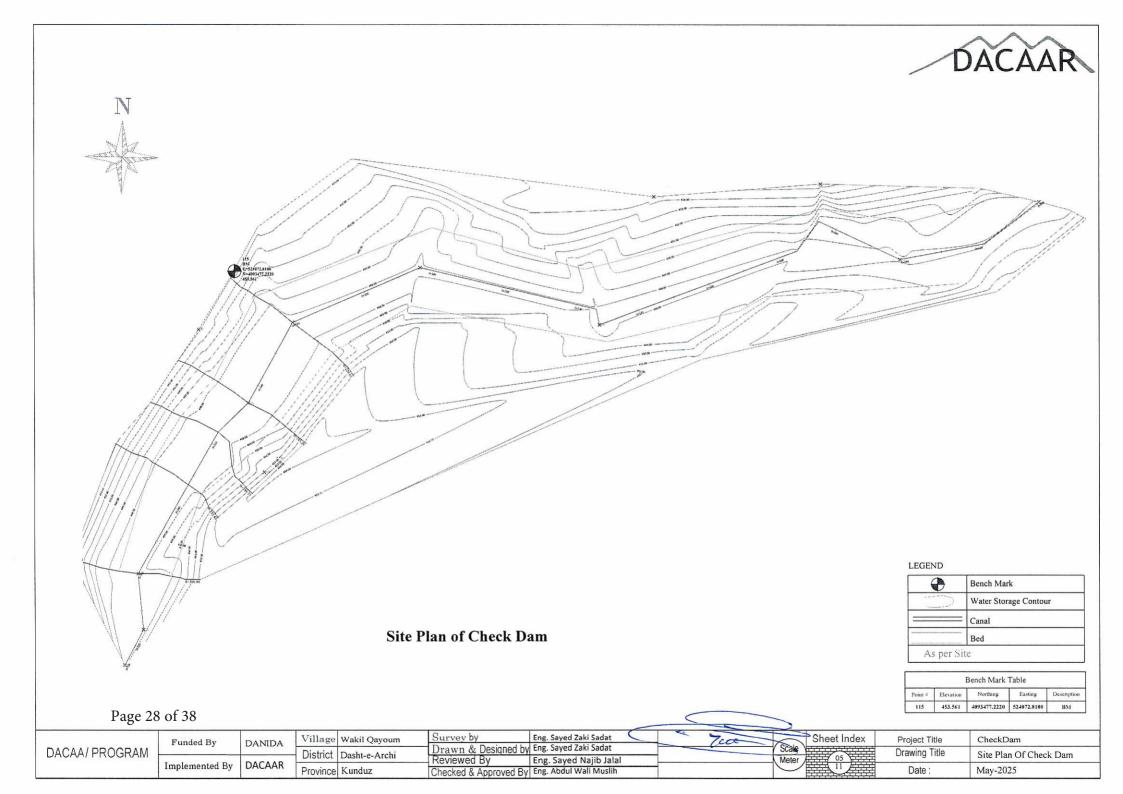



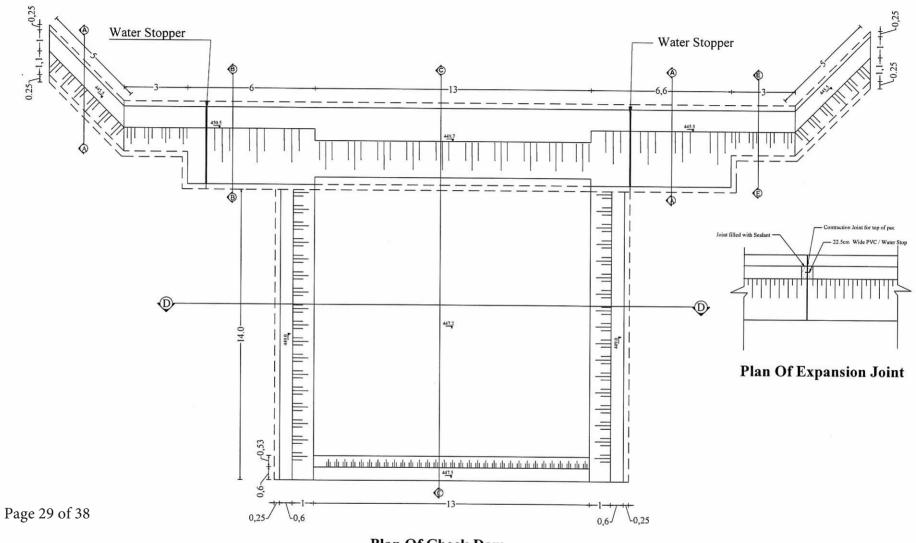


Ne:

Plan Of Check Dam

- All dimensions are in M.
- All Excavated material can be use it upstream and downstream faces fillings with 90% Compaction.
- Filling layers must not be Pave more than (15-20)cm thickness.


DACAA/PROGRAM	Funded By	DANIDA	Village Wakil Qayoum	Survey by Drawn & Designed I	Eng. Sayed Zaki Sadat	(<	Tue	Sheet Index	Project Title	CheckDam
D71070171110017111	Implemented By	DACAAR	District Dasht-e-Archi	Reviewed By	Eng. Sayed Najib Jalal			Meter 06	Drawing Title	Plan Of Check Dam
	Implemented by	DACAAN	Province Kunduz	Checked & Approved E	By Eng. Abdul Wali Muslih			The state of the s	Date:	May-2025



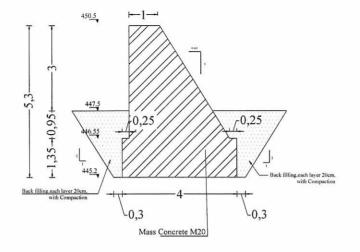

Detail drawings of Check Dam structure with cutting & filling at the deferent location

O Section B

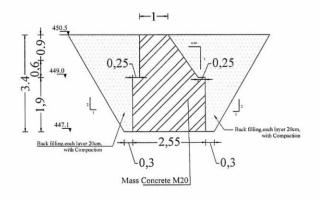

--1--1 -3.4 -0.6+0.9+ 449.0 -1,9 - Back filling,each layer 20cm, with Compaction Back filling,each laver 20cm, with Compaction 0,3 Mass Concrete M20

Detail drawings of Check Dam structure with cutting & filling at the deferent location

O Section A

L=8 m


Detail drawings of Check Dam structure with cutting & filling at the deferent location


O Section E

Page 30 of 38

D4044/DD00D444	Funded By	DANIDA	Village Wakil Qayoum	Survey by Eng. Sayed Zaki Sadat Drawn & Designed by Eng. Sayed Zaki Sadat CCC Scale Scale Project Title Drawing Title	CheckDam
DACAA/ PROGRAM		DAGAAD	District Dasht-e-Archi	Reviewed By Eng. Sayed Najib Jalal Meter 07	Detail drawings of Check Dam
	Implemented By	DACAAR	Province Kunduz	Checked & Approved By Eng. Abdul Wali Muslih Date :	May-2025



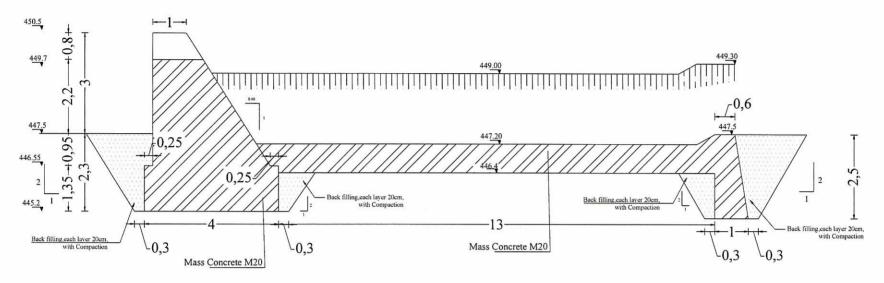

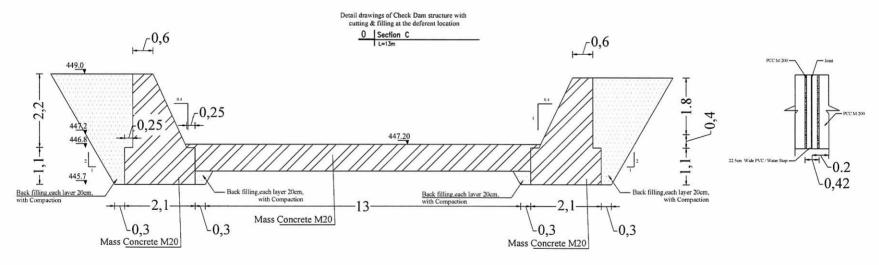

Detail drawings of Check Dam structure with cutting & filling at the deferent location

O Section D

Page 31 of 38

	Funded By	DANIDA	Village Wakil Qayoum	Survey by	Eng. Sayed Zaki Sadat	7111	Sheet Index	Project Title	CheckDam
DACAA/ PROGRAM		DAGAAR	District Dasht-e-Archi	Reviewed By	Eng. Sayed Zaki Sadat Eng. Sayed Najib Jalal		Scale 08	Drawing Title	Detail drawings of Check Dam
	Implemented By	DACAAR	Province Kunduz					Date :	May-2025



Sheet Index


Project Title


Drawing Title

CheckDam

May-2025

Cutting Section

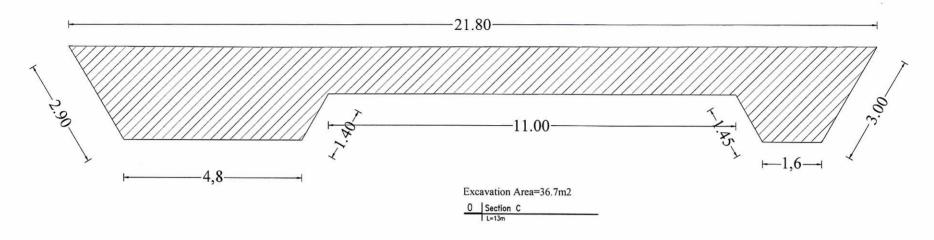

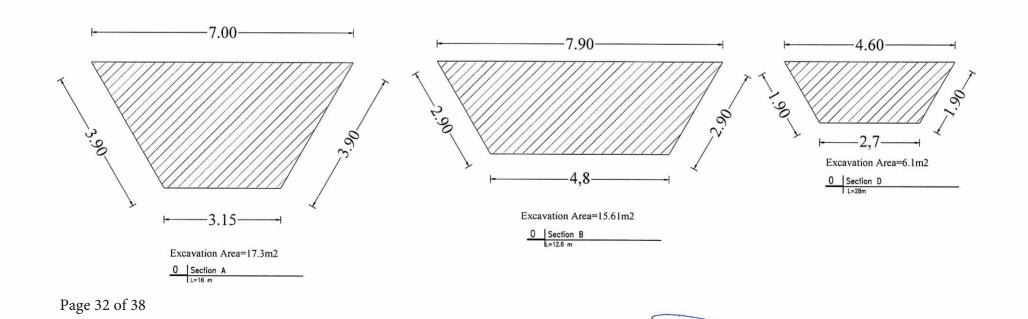

Survey by Eng. Sayed Zaki Sadat Drawn & Designed by Eng. Sayed Zaki Sadat

Reviewed By Eng. Sayed Najib Jalal Checked & Approved By Eng. Abdul Wali Muslih

Village Wakil Qayoum

District Dasht-e-Archi

Province Kunduz

Funded By

Implemented By


DACAA/ PROGRAM

DANIDA

DACAAR



WAKIL QAYOUM PROJECT PROFILE

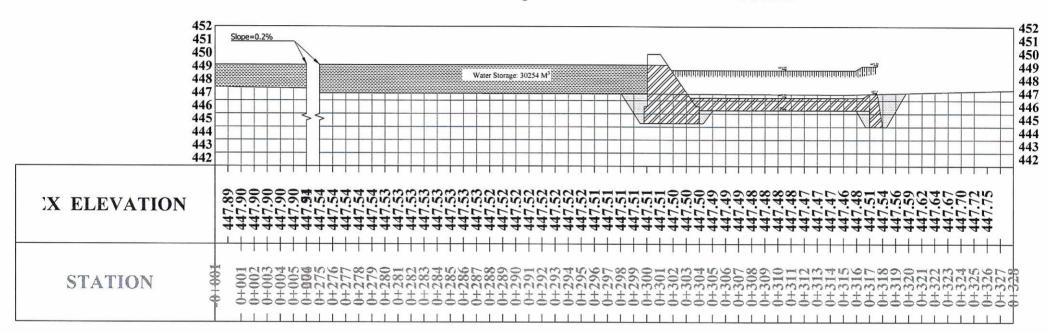


WAKIL QAYOUM CHECK DAM ON RIVER L-SECTION

Page 33 of 38

	Funded By	DANIDA	Village Wakil Qayoum	Survey by	Eng. Sayed Zaki Sadat	C 7		Sheet Index	Project Title	CheckDam
DACAA/PROGRAM	- unaca Dy	DANIDA	District Dasht-e-Archi	DIGHTI CO DODIGITOO D	Eng. Sayed Zaki Sadat	100	Scale `		Drawing Title	
THE RESERVED TO SERVED TO	Implemented By	DACAAR		Reviewed By	Eng. Sayed Najib Jalal		Meter	10		L- SECTION
	Implemented By	071075111	Province Kunduz	Checked & Approved By	Eng. Abdul Wali Muslih				Date :	May-2025



0+272.83

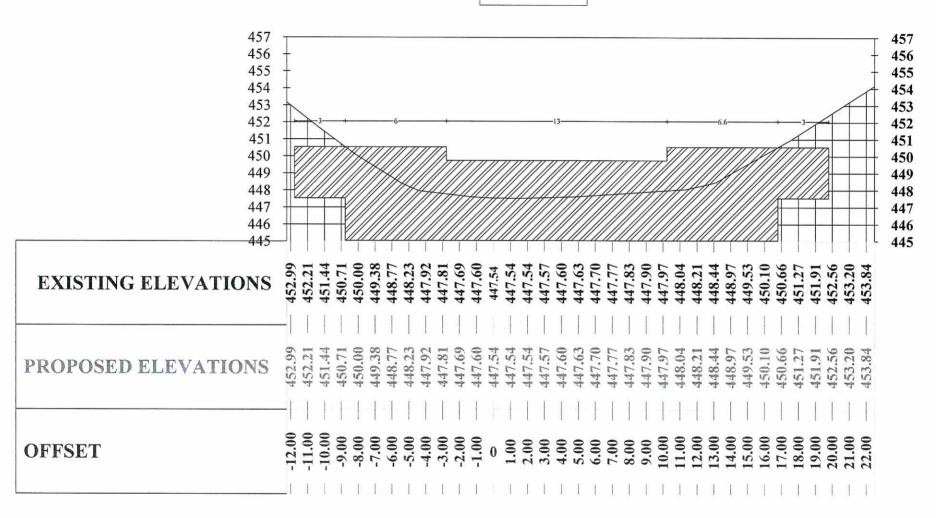

WKIL QAYOUM CHECK DAM ON RIVER X- SECTION AT CH:0+272.83

Page 34 of 38

	Funded By	DANIDA	Village Wakil Qayoum	Survey by	Eng. Sayed Zaki Sadat	Tous	Sheet Index	Project Title	CheckDam
DACAA/ PROGRAM	T 1 1D	DACAAR	District Dasht-e-Archi	Drawn & Designed by Reviewed By	Eng. Sayed Zaki Sadat Eng. Sayed Najib Jalal		Scale Meter	Drawing Title	X- SECTION AT CH:0+272.83
	Implemented By	DACAAR	Province Kunduz		Eng. Abdul Wali Muslih		Meter	Date :	May-2025

Technical and Coordination Unit/Survey and DesignTeam Bill of Quantity (BOQ)for Construction of Wakil Qayoum Check Dam

Province: Kunduz District: Dasht-e-Archi Village: Wakil Qayoum

Subproject Name: Wakil Qayoum Estimation Date: 20.05.2025 Submitting Date: 20.05.2025

No.	ltem .	Activities %	Quantity	Unit	Unit cost	Total cost Afs		tribution DACAAR, Af
1	Mobilization: includes the price of all activities such as the transfer of personnel, tools, vehicles, field establishment office and other activities for the implementation of the project and demobilization.		1	LS				
2	"Excavating normal works: which means digging works that were done without hydraulic machines and removal of excess materials up to 500 meters or according to the instructions of the field engineer. For more clarification, refer to paragraph 2.02 of technical specifications		1,150	МЗ				
3	Dense filling" refers to the filling of material with the quality of Will Grade, which can be verified from one area and its density is not less than 90% of Proctor Mody Fide ATM. If the compaction is done by machine, the thickness of the soil should not be increased from 20 cents, in the images of compacting the soil by manual machines, its thickness should not be increased from 10 cents.		460	М3		5		/
4	"Mass concrete (M 200): shall contain a maximum of 40% stone with a maximum stone size as 20cm ,along with its associated works must be carried out in accordance with the drawings and technical specifications, under the supervision of the supervising engineer."		776	МЗ				
5	"Installation of water stopper with concrete M (1:4): "along with its associated works must be carried out in accordance with the drawings and technical specifications, under the supervision of the supervising engineer."		13	m			/	/
	Total Cost in Afg	The State of Salarania				0 Afs	1	//
	Total Cost in USD	BATT OF STREET, INST	THE RESERVED			\$0	/ //	11

Prepared by:

Name: Position:

Sayed Zaki Sadat Survey & Design Engineer

Signature:

20105, 2025

Review and Checked by:

Name:

Sayed Najib Jalal

Position:

Survey & design Coordinator

Signature:

Authorized by:

Name: Eng.Ab.Wali Musli

Position: Manager Technical & Coordination Unit

Signature:

Approved by:

Name: Eng. Shah Wali

Position: Deputy Director/Head of Program

Signature:

Page 36 of 38

Technical and Coordination Unit/Survey and DesignTeam Bill of Quantity (BOQ)for Construction of Wakil Qayoum Check Dam

Province Kunduz District: Dasht-e- Archi Village: Wakil Qayoum Subproject Name: Wakil Qayoum Estimation Date: 20.05.2025 Submitting Date: 20.05.2025

									O CHO I I I I I I	.9 00.0.	20.00.20				
S/N	Description	QNT	Unit	SENE DIRECT					We	eks			45050	RY DESIGN	
1	Mobilization: includes the price of all activities such as the transfer of personnel, tools, vehicles, field establishment office and other activities for the implementation of the project and demobilization.	1	LS		2	3	4	5	6	7	8	9	10	11	12
2	"Excavating normal works: which means digging works that were done without hydraulic machines and removal of excess materials up to 500 meters or according to the instructions of the field engineer. For more clarification, refer to paragraph 2.02 of technical specifications		m3				73.63								
3	Dense filling" refers to the filling of material with the quality of Will Grade, which can be verified from one area and its density is not less than 90% of Proctor Mody Fide ATM. If the compaction is done by machine, the thickness of the soil should not be increased from 20 cents, in the images of compacting the soil by manual machines, its thickness should not be increased from 10 cents.	460	m3												
4	"Mass concrete (M 200): shall contain a maximum of 40% stone with a maximum stone size as 20cm , along with its associated works must be carried out in accordance with the drawings and technical specifications, under the supervision of the supervising engineer."	776	m3								W.A.		/	9 1	
5	"Installation of water stopper with concrete M (1:4): "along with its associated works must be carried out in accordance with the drawings and technical specifications, under the supervision of the supervising engineer."	13	m									/	1		

Prepared by:

Name: Positior Signature: Sayed Zaki Sadat Survey & Design Engineer

20,05,2025

Review and Checked by:

Name : Positior Signature: Sayed Najib Jalal Survey & Design Coordinator

Cnly

20/05/2025

Authorized by :

Name: Position : Eng.Ab. Wali Mustin Manager Technical & Coordination Unit

Signature:

Approved by:

Name:

Eng. Shah Wali

Position: Signature: Deputy Director/Head of Program

20.05.25

Concre	te M 20 Price per 1 Co	ubic Meter (40%	6 Boulder)		
	Materi	al			
Description	Unit	Quantity	Waste	Cost	Total
Cement	50 Kg Bag	4.7040000	0%		
sand	M ³	0.2520000	0%		-
Gravel	M ³	0.5040000	0%		
Boulder	M ³	0.4000000	0%		-
Water Charges	M ³	0.1700000	0%		
Air entrained	Lit	0.0400000	0%		
Subtotal Material					-
	Labo	Г		-	
Description	Unit	Quantity	Waste	Cost	Total
Skilled Labor	Man	0.1050000	0%		-
Un Skilled Labor	Man	0.9150000	0%		
Subtotal Labor			*		-
	Equipm	ent			
Description	Unit	Quantity	Waste	Cost	Total
Formworks	m ²	2	0%		/ -
Hands Tools	Set	0.0143000	0%		-
Mixer	No	0.0019000	0%		-
Viberator	No	0.0019000	0%		/ -
Fuel for Mixer and Viberator	Lit	0.2600000	0%	/	-
Subtotal Tools			-		-
	Grand Total				1

Prepared by:

Name:

Sayed Zaki Sadat

Position:

Survey & Design Engineer

Signature:

Review and Checked by:

Name: Position: Sayed Najib Jalal

Signature:

Survey & Design Coordinator

Authorized by:

Name: Position:

Eng.Ab.Wali Muşlir Manager Technical Coordination

Signature:

Approved by:

Name: Position:

Signature:

Eng. \$hah Wali

Deputy Director/Head of Program